

AUTO CONCRETE MIXER H-1000H




PIQUERSA

Diesel Engine	PERKINS 403J-17T
Power	25,5 CV
N° cylinders	3
Cooling	Water cooler
Emission Standards	Stage V

H-1000H

Auto Concrete Mixer

Transmission	Hydrostatic 4x4 with two gears, "short" and "long".
Brakes	Hydraulics
Steering	Hydraulic
Chassis	Rigid
Driver Seat	Anatomical, homologate, adjustable according to the drive weight and with homologated seat belt.
Wheels	
Front	10,0/75 - 15.3"
Rear	10,0/75 - 15.3"
Tanks	
Oil	50 L
Fuel	32 L
Hopper	Swivel Unloading (180°) and gutters.
Drum	1.000 L
Mix	700 L
Maximum trailer load (Optional Hook)	
Without Brakes	1.500 Kg
With Brakes	3.250 Kg
Unladen Weight	3.050 kg
Hydraulic system	Self-sufficiency of water by self-priming motor-pump and liter counter.
Water pump	200 l/min
Water tank	350 L
Equipment	Swivel cabin. Liter counter. Hand throttle. Reverse Warning Signal. Flashing beacon Seat belt. Self-priming pump.
Security	Roll-cage / Safety roof
Options	Homologated Lights. Washing equipment: High pressure water gun pump (150 bar) Seat belt with micro. Windscreen and windscreen wipers.

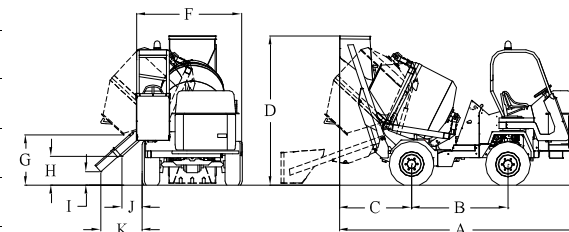

Dimensions (mm)

- A – 4.400 Maximum length
- B – 1.670 Wheelbase
- C – 1.330 Rear extension
- D – 2.560 Maximum height
- F – 1.860 Maximum width
- G – 900 Side unloading height
- H – 520 Unloading height for one gutter
- I – 230 Unloading height for two gutters
- J – 380 Unloading length for one gutter
- K – 700 Unloading length for two gutters
- Front track width: 1.400
- Front track width: 1.495

Maximum gradient: short 35%, long 15%.

