

FORKLIFT CA-1200




Diesel Engine	KOHLER
Power	15,5 CV
N° cylinders	2
Cooling	Water cooler
Emission Standards	Stage V

CA-1200

Forklift

Transmission	Mechanical front traction by Cardan
Gearbox	4+4 speeds with reverser
Brakes	Hydraulics.
Clutch	Single dry plate
Steering	Hydraulic
Chassis	Rigid
Driver Seat	Anatomical, homologate, adjustable according to the drive weight and with homologated seat belt.
Wheels	
Front	27 x 8,50 - 15"
Rear	6.00-9" 12PR
Outer Turning Radius	350 cm.
Tanks	
Oil	30 L
Fuel	25 L
Working Load	1.200 kg
Maximum elevation height	2.500 mm.
Maximum gradient	34%
Unladen Weight	2.260 kg.
Equipment	Flashing Beacon. Seat belt. Electrical Start and Stop. Left rear-view mirror. Reverse Warning Signal. Load guard. Sideshift and forks.
Security	Roll-cage / Safety roof
Options	Homologated Lights. Seat belt with micro. Windscreen and windscreen wipers. Mast 1.200 Kg at 2.000 mm. Mast 1.200 Kg at 3.200 mm.

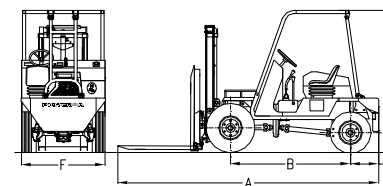

Dimensions (mm)
 A – 3.800 Maximum length
 B – 1.720 Wheelbase
 C – 420 Rear extension
 D – 2.040 Maximum height
 F – 1.240 Maximum width
 Front track width: 960
 Front track width: 1.000

